



中国认可
国际互认
检测
TESTING
CNAS L4595

Page 1 of 32

Report No.: LCSA08255005E

EMC TEST REPORT

For

Panelmate Intelligent Equipment (Jiangsu) Co., Ltd.

Stainless Industrial Touch Screen Monitor

Test Model: IDD62156H

Additional Model No.: Please Refer To Page 9

Prepared for : Panelmate Intelligent Equipment (Jiangsu) Co., Ltd.
Room 101, Building 15, No. 99, Mingxuan Road,
Address : Yudong Town, Haimen District, Nantong City, Jiangsu
Province

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Room 101, 201, Building A and Room 301, Building C,
Address : Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-82591330
Fax : +(86) 0755-82591332
Web : www.lcs-cert.com
Mail : webmaster@lcs-cert.com

Date of receipt of test sample : August 25, 2025
Number of tested samples : 1
Serial number : Prototype
Date of Test : August 25, 2025-September 04, 2025
Date of Report : September 04, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**TEST REPORT****Report No.** : LCSA08255005E**Date of Issue** : September 04, 2025**Testing Laboratory Name** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address** : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China**Testing Location/ Procedure** : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name** : Panelmate Intelligent Equipment (Jiangsu) Co., Ltd.**Address** : Room 101, Building 15, No. 99, Mingxuan Road, Yudong Town, Haimen District, Nantong City, Jiangsu Province**Test Specification****Standard** : EN IEC 61000-6-3:2021
EN IEC 61000-6-2:2019**Test Report Form No** : TRF-4-E-003 A/0**TRF Originator** : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF** : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Stainless Industrial Touch Screen Monitor**Trade Mark** : Panelmate**Test Model** : IDD62156H**Result** : Pass**Compiled by:****Supervised by:****Approved by:**

Emma Wang / File Administrator

Jelly Li / Technique principal

Gavin Liang / Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TEST REPORT

Test Report No.: LCSA08255005ESeptember 04, 2025
Date of issue**Test Model..... : IDD62156H****EUT..... : Stainless Industrial Touch Screen Monitor****Applicant..... : Panelmate Intelligent Equipment (Jiangsu) Co., Ltd.****Address..... : Room 101, Building 15, No. 99, Mingxuan Road, Yudong Town, Haimen District, Nantong City, Jiangsu Province****Telephone..... : /****Fax..... : /****Manufacturer..... : Panelmate Intelligent Equipment (Jiangsu) Co., Ltd.****Address..... : Room 101, Building 15, No. 99, Mingxuan Road, Yudong Town, Haimen District, Nantong City, Jiangsu Province****Telephone..... : /****Fax..... : /****Factory..... : Panelmate Intelligent Equipment (Jiangsu) Co., Ltd.****Address..... : Room 101, Building 15, No. 99, Mingxuan Road, Yudong Town, Haimen District, Nantong City, Jiangsu Province****Telephone..... : /****Fax..... : /****Test Result****Pass**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	September 04, 2025	Initial Issue	/





TABLE OF CONTENTS

Test Report Description	Page
1. TEST STANDARDS	6
2. SUMMARY OF STANDARDS AND RESULTS	7
2.1 Description of Standards and Results	7
2.2 Description of Test Modes	8
2.3 Description of Performance Criteria	8
3. GENERAL INFORMATION	9
3.1 Description of Device (EUT)	9
3.2 Support equipment List	9
3.3 Description of Test Facility	9
3.4 Measurement Uncertainty	9
4. MEASURING DEVICES AND TEST EQUIPMENT	10
5. EMISSION TEST RESULTS (EMI)	11
5.1 Radiated Emissions(30-1000MHz)	11
5.2 Radiated Emissions-Above 1G	17
6. IMMUNITY TEST RESULTS (EMS)	23
6.1 Electrostatic Discharge Test	23
6.2 Continuous Radio Frequency Disturbances Test	26
7. TEST SETUP PHOTOS	29
8. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	31





1. TEST STANDARDS

EN IEC 61000-6-3:2021:Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for equipment in residential environments

EN IEC 61000-6-2:2019:Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity standard for industrial environments





2. SUMMARY OF STANDARDS AND RESULTS

2.1 Description of Standards and Results

EMISSION (EMI)			
Description of Test Item	Standard	Result	Memo
Radiated Emissions(30-1000MHz)	EN IEC 61000-6-3:2021	PASS	/
Radiated Emissions-Above 1G	EN IEC 61000-6-3:2021	PASS	/
IMMUNITY(EMS)			
Description of Test Item	Standard	Result	Memo
Electrostatic Discharge Test	EN IEC 61000-6-2:2019	PASS	/
Continuous Radio Frequency Disturbances Test	EN IEC 61000-6-2:2019	PASS	/
Power-Frequency Magnetic Fields	EN IEC 61000-6-2:2019	N/A	Applicable only to equipment containing devices intrinsically susceptible to magnetic fields





2.2 Description of Test Modes

No	Title	Description
Mode 1	Working(DC 24V)	/

2.3 Description of Performance Criteria

Performance Criteria

Performance criterion A

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B

The apparatus shall continue to operate as intended after the test, No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed, If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.





3. GENERAL INFORMATION

3.1 Description of Device (EUT)

EUT	: Stainless Industrial Touch Screen Monitor
Test Model	: IDD62156H
Additional Model	: IDD62156-XXXX, IDD62156H-XXXX, IDD62215-XXXX, IDD61156-XXXX, IDD61156H-XXXX, IDD61215-XXXX
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Power Supply	: 24V 1.5A
Highest Internal Frequency	: ≤108MHz

3.2 Support equipment List

Equipment	Manufacturer	Model	Serial Number	Description
PC	Lenovo	Lenovo E41-55	MP1ZW5C4	/
Keyboard	dell	KB212-B	N-0DJ365-71616- 47C-0S7C-A0	/
Mouse	dell	MS111-P	CN-011D3V- 71581-0BM	/

3.3 Description of Test Facility

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

3.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emission (9kHz to 150kHz)	± 2.63 dB
Conducted Emission (150kHz to 30MHz)	± 2.35 dB
Power Disturbance (30MHz to 300MHz)	± 2.90dB
Voltage Fluctuations & Flicker	± 0.510%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





4. MEASURING DEVICES AND TEST EQUIPMENT

Radiated Emissions(30-1000MHz)				
Equipment	Manufacturer	Model No	Serial No.	Due Date
EMI Test Software	Farad	EZ	/	/
EMI Test Software	AUDIX	E3	/	/
By-log Antenna	SchwarZBECK	VULB9163	01565	2027/07/12
Horn Antenna	ETS	3115	EABF-018	2027/07/19
EMI Test Receiver	R&S	ESR3	102311	2026/05/22
Broadband Preamplifier	/	BBV9745	00317	2025/11/07
EMI Test Receiver	R&S	ESC17	101173	2025/10/07
By-log Antenna	SchwarZBECK	VULB9163	01143	2027/07/19

Radiated Emissions-Above 1G				
Equipment	Manufacturer	Model No	Serial No.	Due Date
EMI Test Software	Farad	EZ	/	/
By-log Antenna	SchwarZBECK	VULB9163	01143	2027/07/19
Horn Antenna	ETS	3115	EABF-018	2027/07/19
MXA Signal Analyzer	Agilent	N9020A	MY53290398	2026/05/22
Broadband Preamplifier	/	BBV9745	00317	2025/11/07

Electrostatic Discharge Test				
Equipment	Manufacturer	Model No	Serial No.	Due Date
ESD Simulator	emtest	ESD NX30.1	111969	2026/05/25

Continuous Radio Frequency Disturbances Test				
Equipment	Manufacturer	Model No	Serial No.	Due Date
MXG Vector Signal Generator	Agilent	E4438C	MY42081396(6G)	2025/10/07
RF POWER AMPLIFIER	SKET	HAP_0306G-50W	--	2026/05/22
RF POWER AMPLIFIER	OPHIR	5225R	1052	2026/05/22
RF POWER AMPLIFIER	OPHIR	5273F	1019	2026/05/22
Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	2026/07/13
Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-482	2027/07/19
RS Electric field probe	narda	EP 601	611WX80208	2026/05/22





5. EMISSION TEST RESULTS (EMI)

5.1 Radiated Emissions(30-1000MHz)

5.1.1 Limits

Frequency	Field Strengths Limits at 10m measuring distance dB(μV)/m	Field Strengths Limits at 3m measuring distance dB(μV)/m
30 MHz to 230 MHz	30	40
230 MHz to 1 GHz	37	47
1 GHz to 3 GHz	/	Average:50; Peak:70
3 GHz to 6 GHz	/	Average:54; Peak:74
30 MHz to 1 GHz	Fundamental 50	Fundamental 60
30 MHz to 300 MHz	Harmonics 42	Harmonics 52
300 MHz to 1 GHz	Harmonics 46	Harmonics 56

Note:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

5.1.2 Test procedure

- (1) The EUT was placed on a non-metallic table (Refer to the 'Block diagram of test setup'). above the ground plane inside an anechoic chamber.
- (2) Test antenna center was located 3m or 10m from the EUT and assistant equipment boundary (imaginary circular periphery) on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN IEC 61000-6-3 on radiated emission test.
- (3) Spectrum frequency from 30 MHz to 1 GHz was investigated.
- (4) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN IEC 61000-6-3 on Radiated Emission test.
- (5) For emissions from 30 MHz to 1 GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.
- (6) Note:1).Pre-Scan all mode, Thus record worse case mode result in this report.
2) Margin= Reading level + Correct factor – Limit
Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor






5.1.3 Test Setup Diagram

Above 1 GHz

For table-top equipment

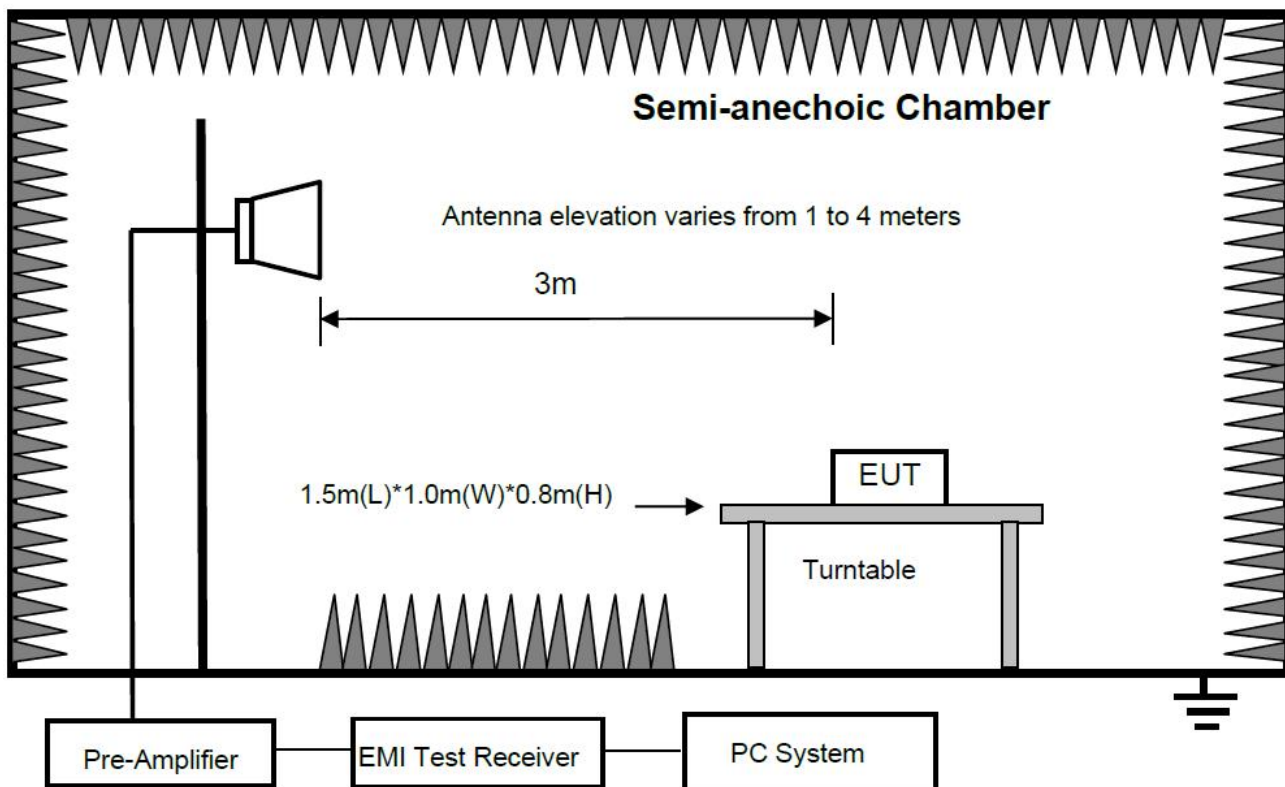

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



For floor standing equipment

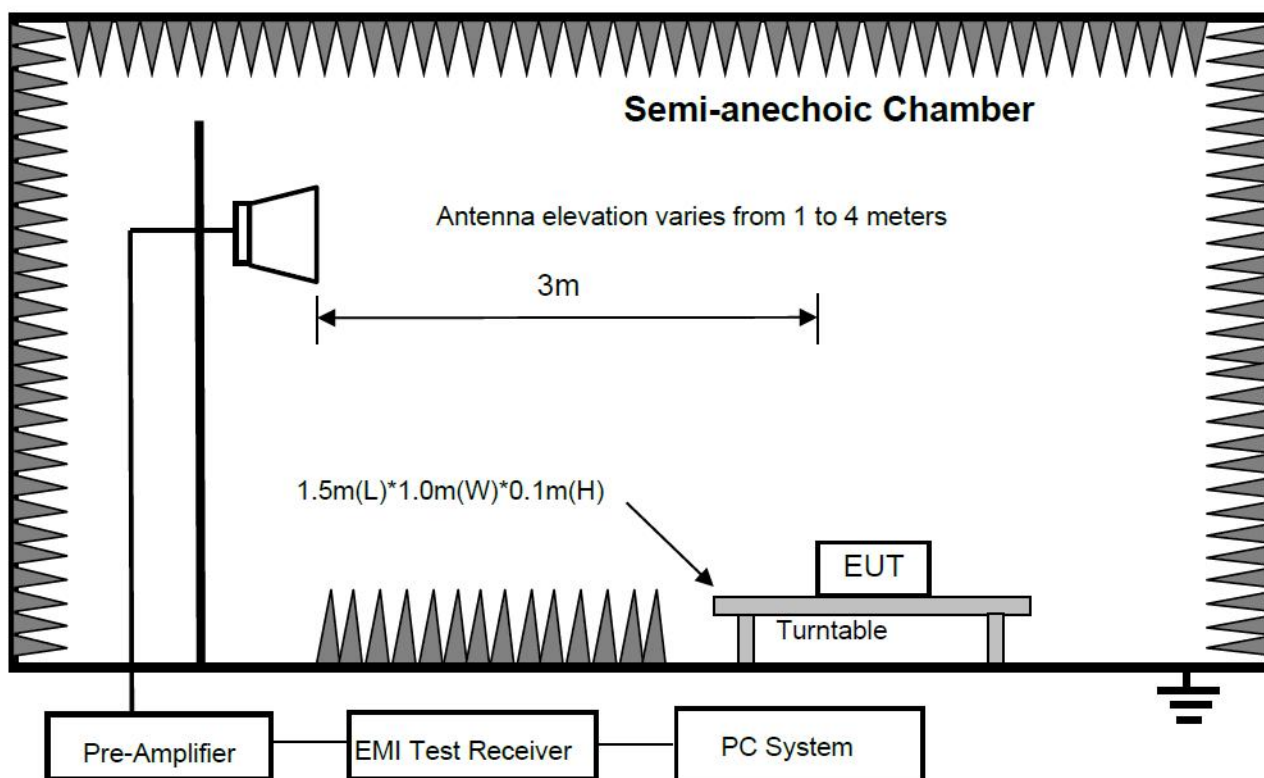

For combinations equipment

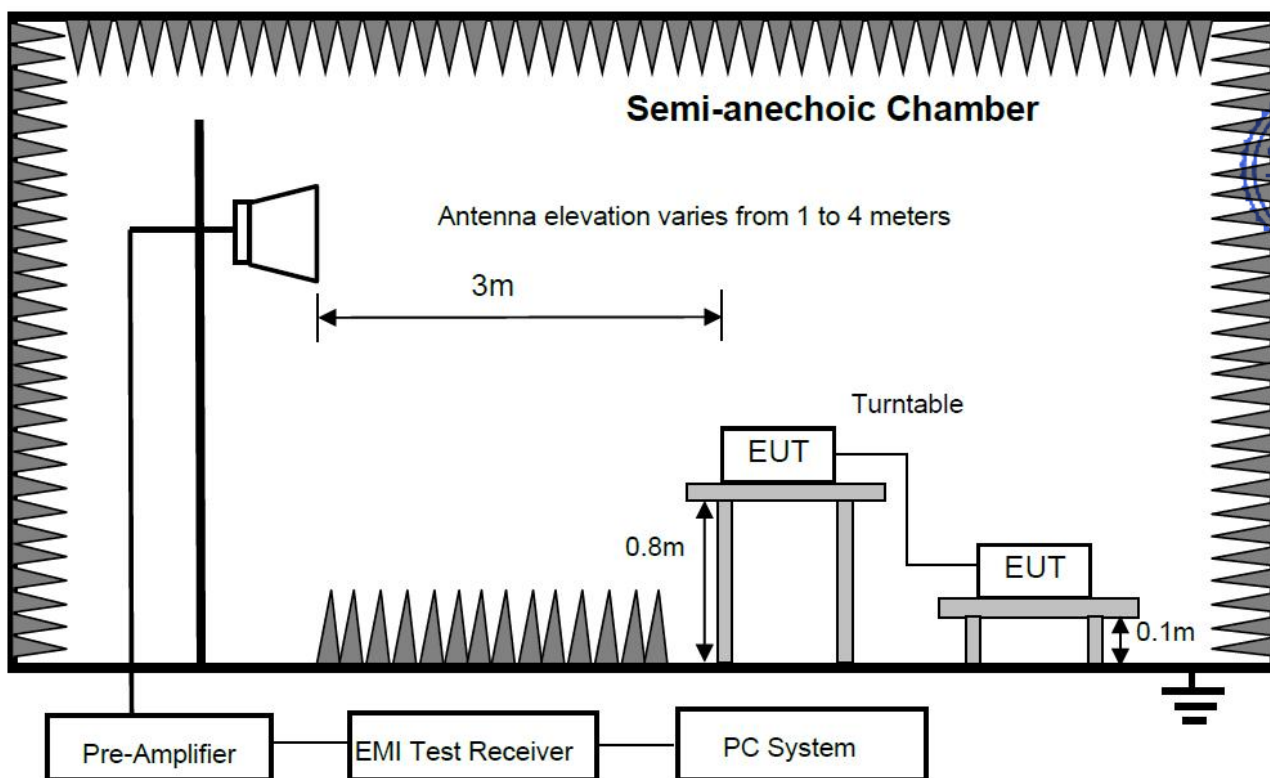



5.1.4 E.U.T. Operation


Operating Environment:			
Temperature:	23.8° C	Humidity:	52.1%RH
Test Engineer	Emma Wang		
Mode 1	Working	Voltage	DC 24V





5.1.5 Test data

Mode 1 / Polarization: Vertical

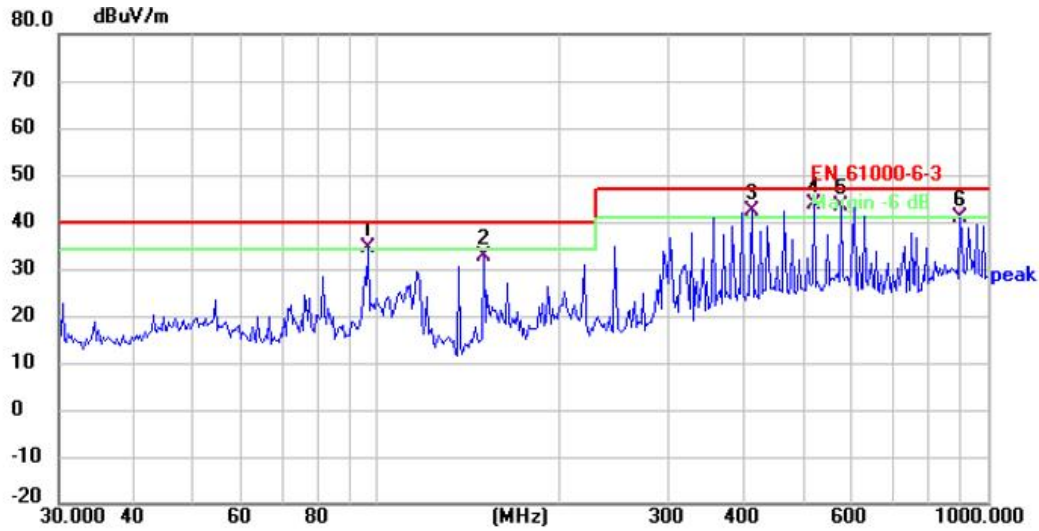


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	96.323	47.20	-12.61	34.59	40.00	-5.41	QP	
2		148.917	48.24	-15.56	32.68	40.00	-7.32	QP	
3	!	409.651	49.97	-7.78	42.19	47.00	-4.81	QP	
4	*	520.208	50.22	-6.47	43.75	47.00	-3.25	QP	
5	!	573.988	48.49	-5.21	43.28	47.00	-3.72	QP	
6		899.958	42.24	-1.36	40.88	47.00	-6.12	QP	





Mode 1 / Polarization: Horizontal

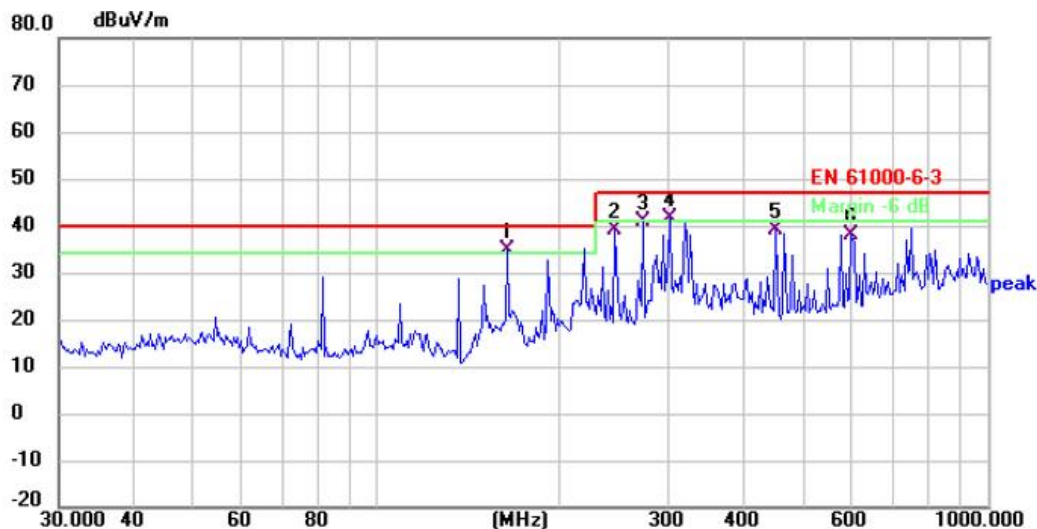

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	163.162	49.62	-14.93	34.69	40.00	-5.31	QP	
2		245.261	50.39	-11.42	38.97	47.00	-8.03	QP	
3	!	272.525	52.39	-11.37	41.02	47.00	-5.98	QP	
4	!	300.699	51.68	-10.08	41.60	47.00	-5.40	QP	
5		448.836	46.54	-7.45	39.09	47.00	-7.91	QP	
6		598.707	42.93	-4.73	38.20	47.00	-8.80	QP	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.2 Radiated Emissions-Above 1G

5.2.1 Limits

Equipment	Frequency	Field Strengths Limits at 10m measuring distance dB(μ V)/m	Field Strengths Limits at 3m measuring distance dB(μ V)/m
Class B Equipment	1 GHz to 3 GHz	/	Average:50; Peak:70
	3 GHz to 6 GHz	/	Average:54; Peak:74
*: These relaxed limits apply only to emission at the fundamental and harmonic frequencies of the local oscillator signals at all other frequencies shall be compliant with the limits of class B equipment given above. Note: (1) The smaller limit shall apply at the cross point between two frequency bands. (2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			

5.2.2 Test procedure

- (1) The EUT was placed on a non-metallic table (Refer to the 'Block diagram of test setup'). above the ground plane inside an anechoic chamber.
- (2) Test antenna center was located 3m or 10m from the EUT and assistant equipment boundary (imaginary circular periphery) on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN IEC 61000-6-3 on radiated emission test.
- (3) Spectrum frequency from 1 GHz to 6 GHz was investigated.
- (4) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to EN IEC 61000-6-3 on Radiated Emission test.
- (5) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz VBW is set at 3 MHz.
- (6)Note:1).Pre-Scan all mode, Thus record worse case mode result in this report.

2) Margin= Reading level + Correct factor – Limit

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor






5.2.3 Test Setup Diagram


Above 1 GHz

For table-top equipment

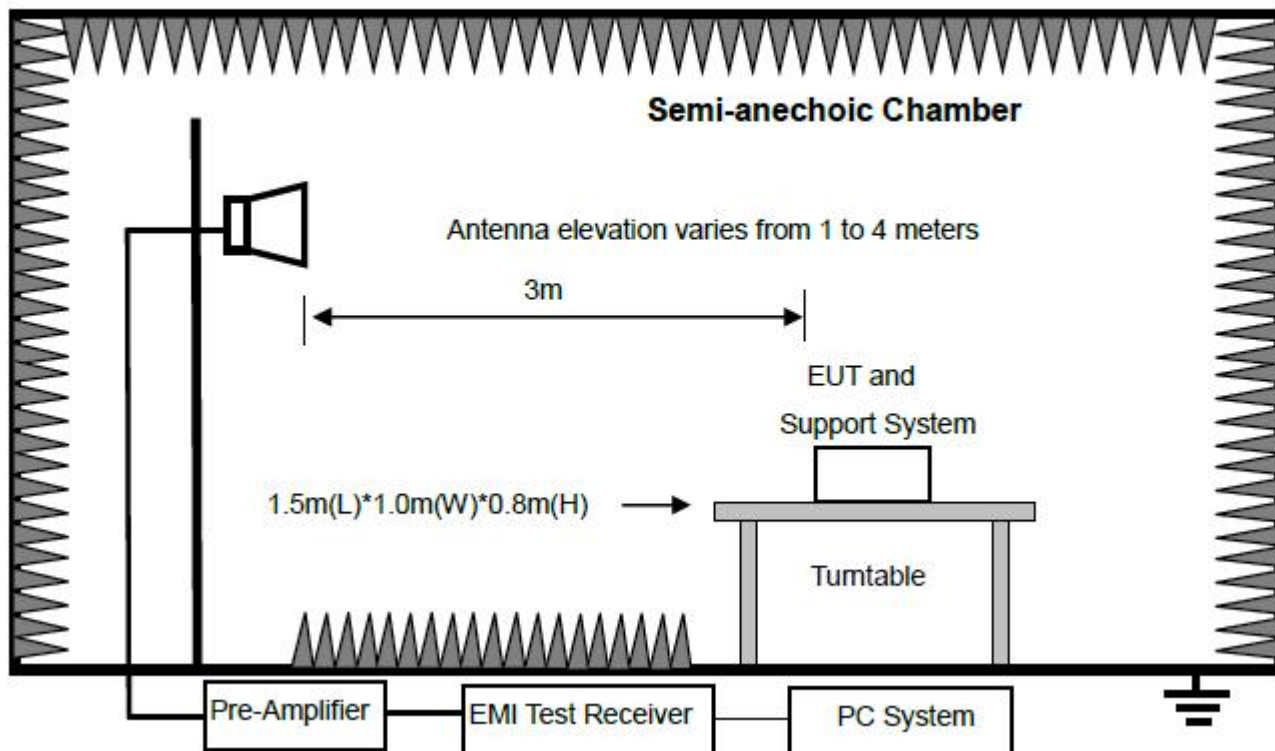




For combinations equipment

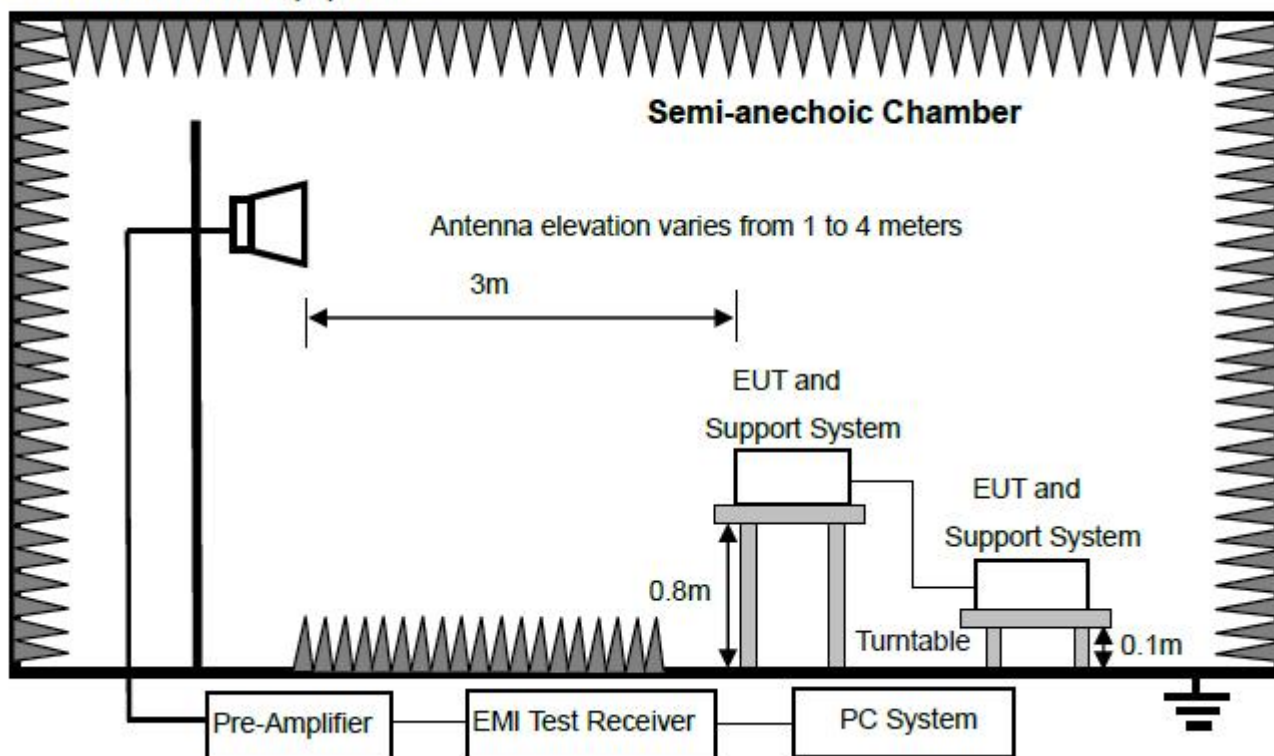

For floor standing equipment

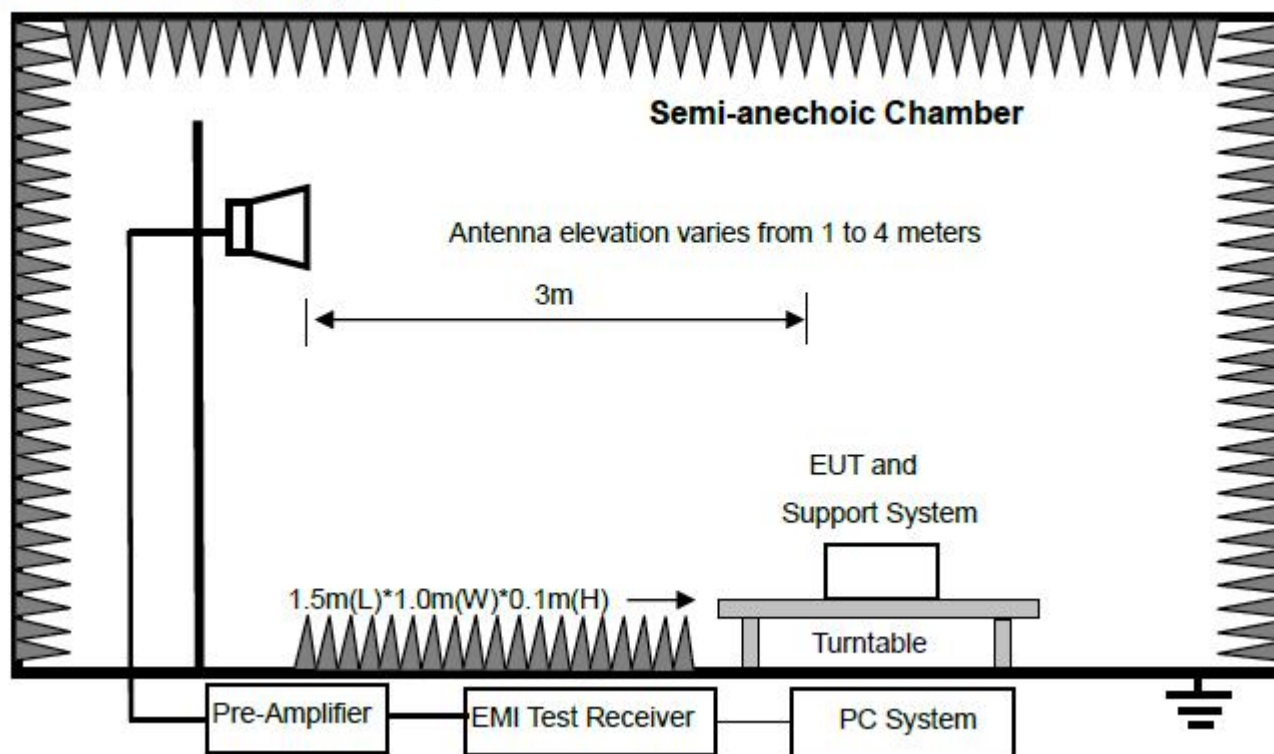



5.2.4 E.U.T. Operation


Operating Environment:			
Temperature:	23.6° C	Humidity:	52.1%RH
Test Engineer	Emma Wang		
Mode 1	Working	Voltage	DC 24V





5.2.5 Test data

Mode 1 / Polarization: Vertical

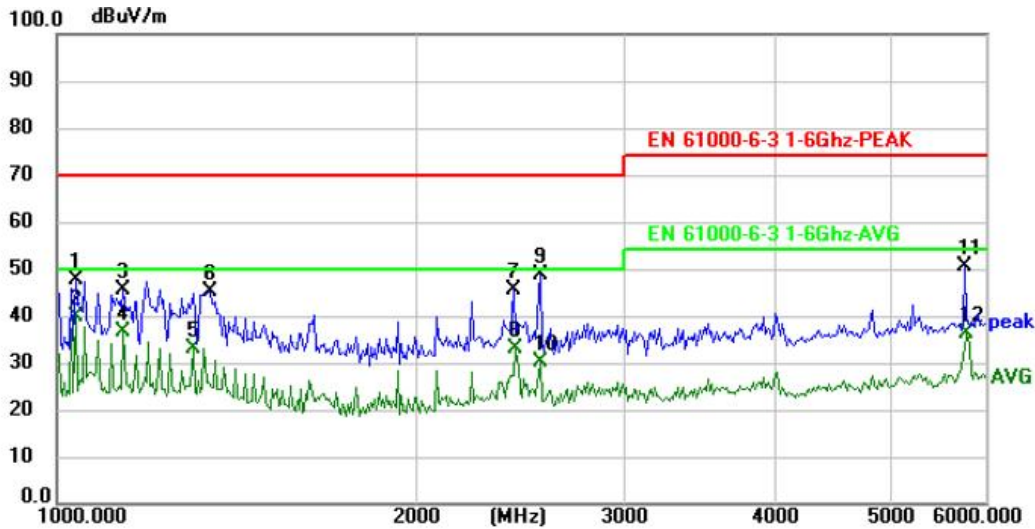


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1036.559	64.53	-16.77	47.76	70.00	-22.24	peak	
2 *	1036.559	56.49	-16.77	39.72	50.00	-10.28	AVG	
3	1137.992	61.82	-16.34	45.48	70.00	-24.52	peak	
4	1137.992	53.08	-16.34	36.74	50.00	-13.26	AVG	
5	1299.684	49.49	-16.47	33.02	50.00	-16.98	AVG	
6	1342.371	61.35	-16.21	45.14	70.00	-24.86	peak	
7	2410.229	58.56	-13.17	45.39	70.00	-24.61	peak	
8	2418.899	46.15	-13.11	33.04	50.00	-16.96	AVG	
9	2543.604	62.01	-13.10	48.91	70.00	-21.09	peak	
10	2543.604	43.38	-13.10	30.28	50.00	-19.72	AVG	
11	5767.633	52.87	-2.45	50.42	74.00	-23.58	peak	
12	5788.380	38.93	-2.60	36.33	54.00	-17.67	AVG	





Mode 1 / Polarization: Horizontal

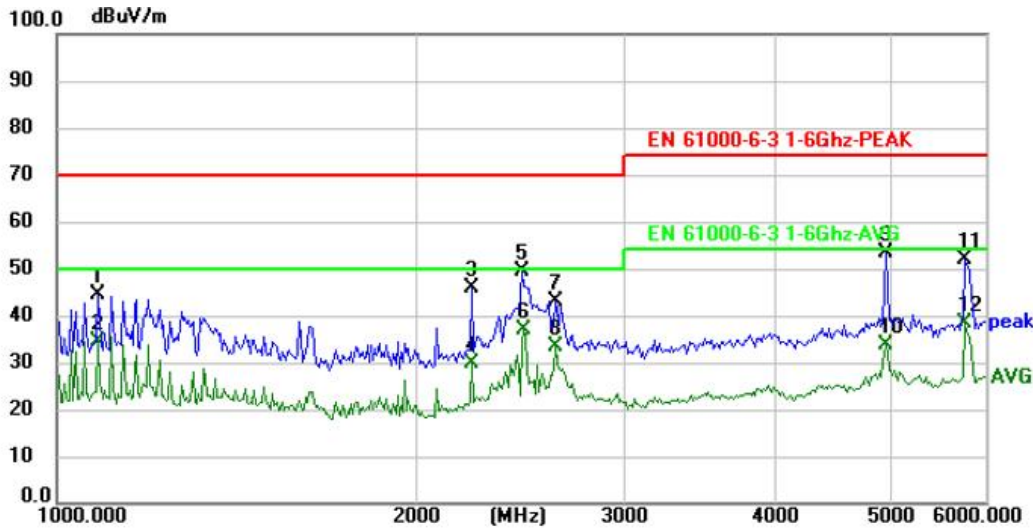

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1082.199	61.27	-16.77	44.50	70.00	-25.50	peak	
2		1082.199	51.11	-16.77	34.34	50.00	-15.66	AVG	
3		2227.158	58.92	-13.20	45.72	70.00	-24.28	peak	
4		2227.158	42.85	-13.20	29.65	50.00	-20.35	AVG	
5		2453.891	62.51	-12.95	49.56	70.00	-20.44	peak	
6	*	2462.718	50.07	-13.04	37.03	50.00	-12.97	AVG	
7		2617.730	56.67	-13.50	43.17	70.00	-26.83	peak	
8		2617.730	46.86	-13.50	33.36	50.00	-16.64	AVG	
9		4942.452	58.79	-5.44	53.35	74.00	-20.65	peak	
10		4942.452	39.21	-5.44	33.77	54.00	-20.23	AVG	
11		5767.633	54.44	-2.45	51.99	74.00	-22.01	peak	
12		5767.633	41.00	-2.45	38.55	54.00	-15.45	AVG	





6. IMMUNITY TEST RESULTS (EMS)

6.1 Electrostatic Discharge Test

6.1.1 Limits

Test Level		Performance Criteria
Air Discharge	±2kV, ±4kV and ±8kV	B
Contact Discharge	±4kV	
Performance criteria B description: During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended.		

6.1.2 Test procedure

Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

Contact Discharge:

All the procedure was same as air discharge. Except that the generator was re-triggered for a new single discharge. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

Indirect discharge for horizontal coupling plane:

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

Indirect discharge for vertical coupling plane:


At least 20 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.






6.1.3 Test Setup Diagram

Table-top equipment

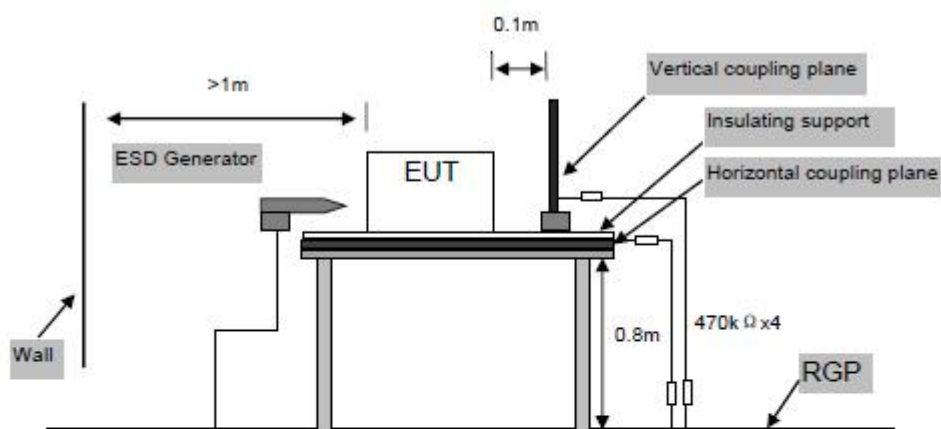

Floor-standing equipment

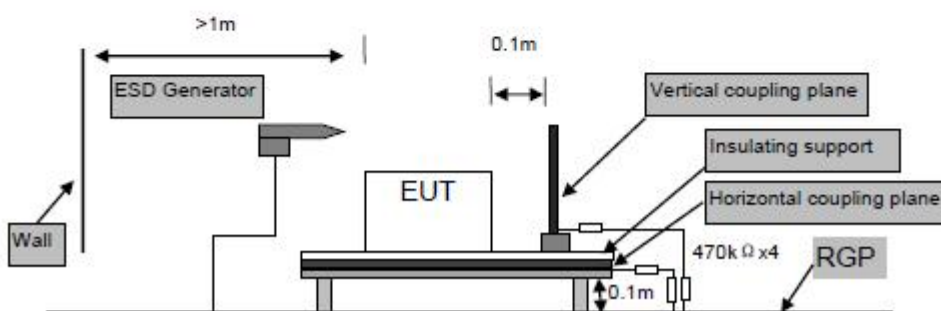

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



6.1.4 Test data

Operating Environment:					
Test Site:	ELECTROSTATIC DISCHARG IMMUNITY TESE (0KV-30KV)		Test Engineer	Emma Wang	
Temperature:	24.1° C		Humidity:	53.3%RH	
Memo:	/				
Sample No.: B250815024001			Mode 1: Working		
Test voltage: DC 24V			Memo:		
Measure parameters: 20 times at each point for contact discharge; 20 times at each point for air discharge. 1 second interval for each discharge.					
Type of discharge	Test level	Test point	Required	Observation	Result
Contact to EUT	±4kV	Front, Back, Left, Right, Top, Bottom	B	B	Pass
Contact to coupling planes	±4kV	Coupling planes	B	A	Pass
Air	±2 kV /±4 kV /±8kV	Front, Back, Left, Right, Top, Bottom	B	B	Pass
Observation description: A: Normal performance within limits specified by the manufacturer requestor or purchaser. B: Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention.					





6.2 Continuous Radio Frequency Disturbances Test

6.2.1 Limits

Swept frequency test		Performance Criteria
Frequency (MHz)	80 to 1000	A
Field Strength	10V/m rms voltage level of the unmodulated signal	
Frequency (MHz)	1400 to 6000	
Field Strength	3V/m rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of $\square$ 1 kHz, $\square$ 400 Hz (note 1)	
Step Size	1% increments	
Dwell time	≤ 5 Sec.	
Performance criteria A description for other devices: During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended.		

6.2.2 Test procedure


The field sensor is placed on the EUT table (Ground clearance height reference "block diagram of test setup") which is 3 meters away from the transmitting antenna. Through the signal generator, power amplifier and transmitting antenna to produce a uniformity field strength around the EUT table from frequency range specified and records the signal generator 's output level at the same time for whole measured frequency range. Then, put EUT and its simulators on the EUT turn table and keep them 3 meters away from the transmitting antenna which is mounted on an antenna tower and fixes at 1 meter height above the ground. Using the recorded signal generator's output level to measure the EUT from frequency range specified and both horizontal & vertical polarization of antenna must be set and measured. Each of the four sides of EUT must be faced this transmitting antenna and measures individually.






6.2.3 Test Setup Diagram

Table-top device

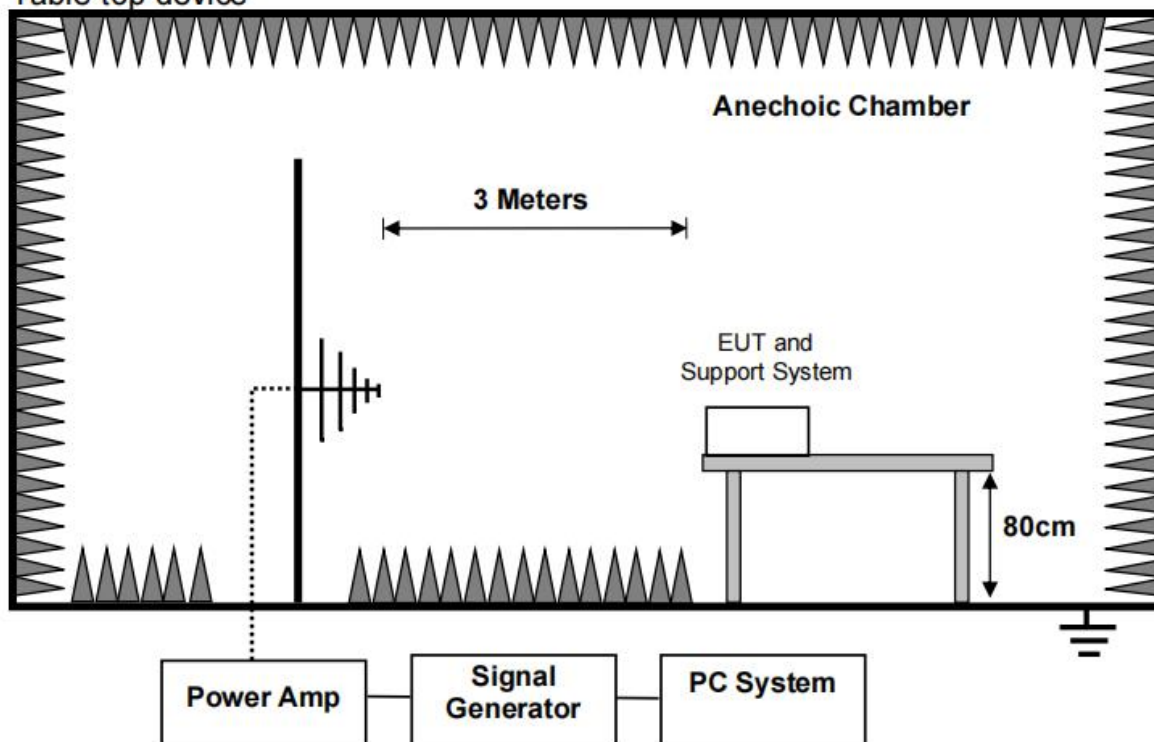

Floor-standing device

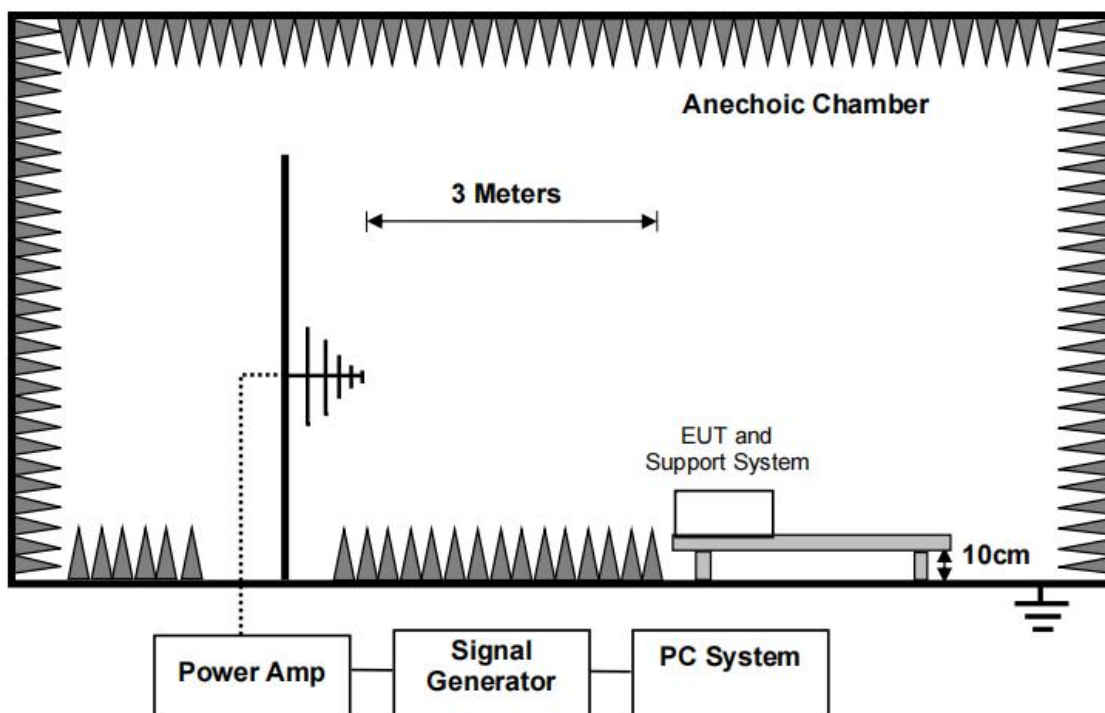



6.2.4 Test data


Operating Environment:						
Test Site:	RF FIELD STRENGTH SUSCEPTIBILITY TEST (UP TO 10V/m)			Test Engineer	Emma Wang	
Temperature:	24.3° C			Humidity:	56.1%RH	
Memo:	/					
Sample No.: B250815024001				Mode 1: Working		
Test voltage: DC 24V				Memo:		
Steps: 1%, Dwell time 1s, 1kHz 80% AM modulation						
Test frequency	Level	EUT position	Antenna polarization	Required	Observation	Result
80MHz to 1000MHz	3V/m	Front	H	A	A	Pass
			V	A	A	Pass
		Left	H	A	A	Pass
			V	A	A	Pass
		Rear	H	A	A	Pass
			V	A	A	Pass
		Right	H	A	A	Pass
			V	A	A	Pass
1400MHz to 6000MHz	3V/m	Front	H	A	A	Pass
			V	A	A	Pass
		Left	H	A	A	Pass
			V	A	A	Pass
		Rear	H	A	A	Pass
			V	A	A	Pass
		Right	H	A	A	Pass
			V	A	A	Pass
Observation description:						
A: Normal performance within limits specified by the manufacturer requestor or purchaser.						





7. TEST SETUP PHOTOS

Radiated Emissions(30-1000MHz)

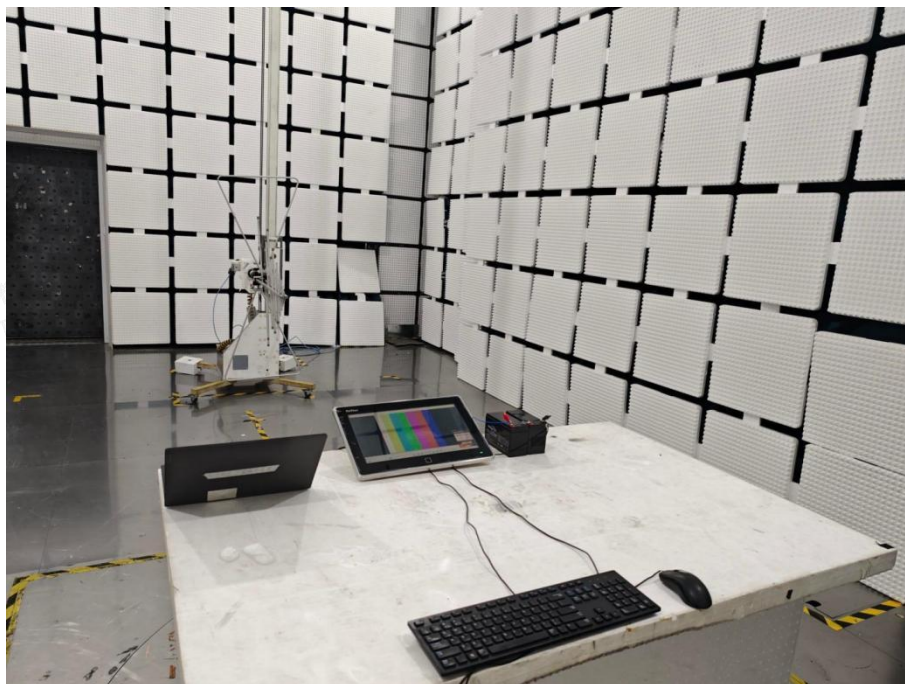

Radiated Emissions-Above 1G





Electrostatic Discharge Test



Continuous Radio Frequency Disturbances Test





8. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)



Fig. 1



Fig. 2





Fig. 3

-----End Report-----

